
ABOVE GROUND SKIMMER ASSEMBLY


Patent Nos:9,890,547/D837,471/D830,012/10,138,645. Other Patents Pending.

Install the rubber sandwich gasket on the gray mounting plate, making sure the gasket straddles both sides of the mounting plate. **(fig. I)**

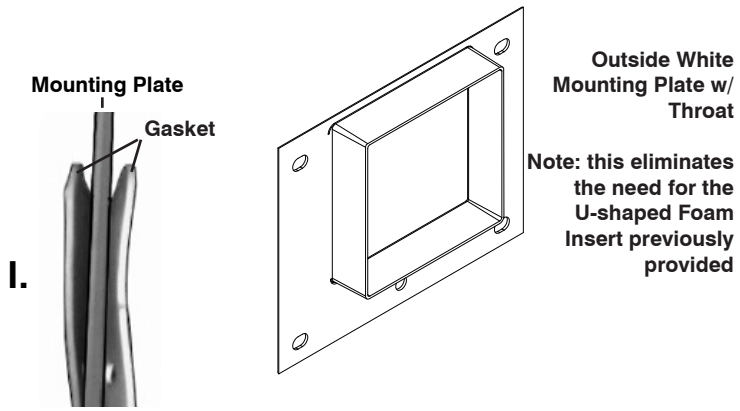

Place the gray mounting plate with gaskets on the pool interior side of the panel cut-out. Insert the white plate with throat on the exterior of the panel, through the pool wall. Secure the assembly with 2¼" countersink bolts and T-nuts loosely through four pre drilled corner holes in the gray mounting plate, the wall panel and the white mounting plate. **(fig. J)**

Use the fifth bolt and T-nut at the bottom center hole in the mounting assembly and tighten firmly. Do not over tighten. (**fig. K)**

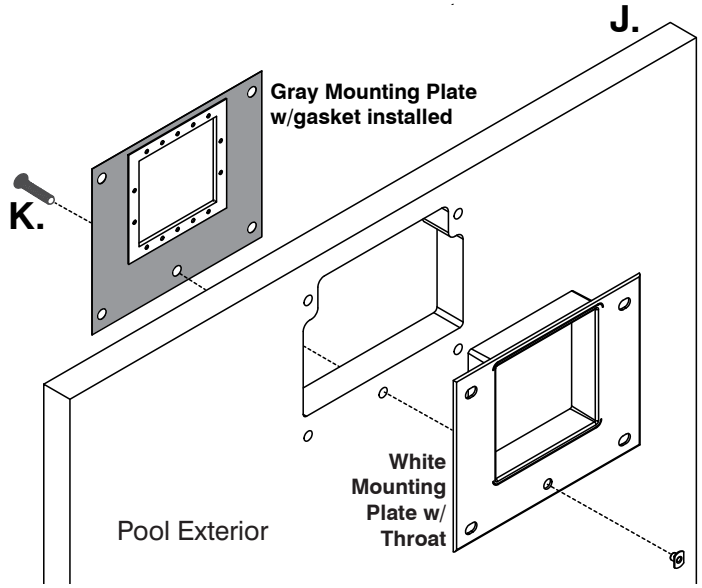

Slip skimmer body through the white plate to the gasket on the gray plate. **(fig. L)**
Secure tightly with two pan head screws (different style screws in the skimmer hardware bag) from the water side through the gaskets and gray plate into the skimmer body center hole on each side. **(fig. M)**

Tighten the four corner bolts, firm, do not over tighten.The skimmer faceplate is attached after the liner is installed.

For Skimmer Assembly instructions for Inground installation, see page 20.

